

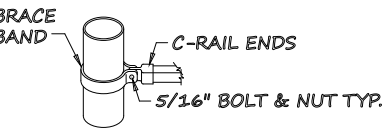

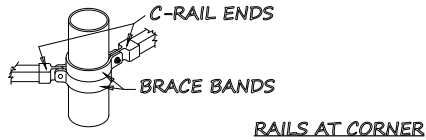



COATINGS:
 FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A
 FABRIC-GALVANIZED PER (ASTM-A392 2.0 OZ/SQ.FT. OR
 -ALUMINUM COATED PER (ASTM-A491) .40 OZ/SQ.FT.
 -PVC COATED PER (ASTM-F668) CLASS 2D
FITTINGS-GALVANIZED PER (ASTM-A153)
TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN


PHYSICAL PROPERTIES:

DIMENSIONS	WALL THICKNESS	WEIGHT PER FOOT	SECTION MODULUS	YIELD STRENGTH	MAX. BENDING MOMENT LB. IN.
3.25" x 2.50"	0.150"	5.40#	1.25	60,000	75,000
OPTIONAL					
3.25" x 2.50"	0.130"	4.50#	1.083	60,000	64,980

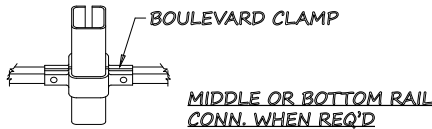


RAILS AT END

0.150	5.40 LB/FT
WALL	7.85 kg/m
0.130	4.50 LB/FT
WALL	6.52 kg/m

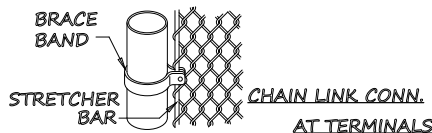


TERMINAL POST
 — LBS PER FT.
 — INCHES O.D.

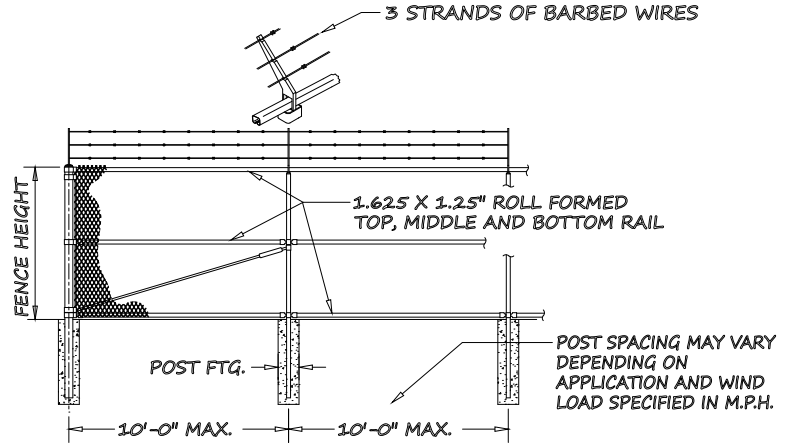

LINE POST TOP
 BARB ARM

CHAIN LINK FABRIC
 #6 GA. 3/8" MESH
 #6 GA. 5/8" MESH



RAIL COUPLING
 (20' MAX. INTERVALS)

CHAIN LINK FABRIC
 3/8" - 5/8" MESH TWIST TOP
 KNUCKLE BOTTOM SELVAGES

TIE WIRES
 24" MAX.
 SPACING

ITEM	QNTY	DESCRIPTION		MATERIAL
		MACHINING TOLERANCES		FABRICATION TOLERANCES
SCALE	NONE	CHK'D BY	DTM	0.1 ± 0.030
				0.01 ± 0.015
				0.001 ± 0.005
				ANGLES ± 1/4"
DWN BY		DTM 2-24-20		APP'D BY
SUPER 'C' - with BARB WIRE, ROUND TERM. (MINI)				

CAD FILENAME:
 FENCE 4-2-1
 LAST PLOT DATE:
 2-24-20

GREGORY
 FENCE
 4300 13th Street SW
 Canton, Ohio 44710

REF. No.
 DRWG No.

FENCE 4-2-1