



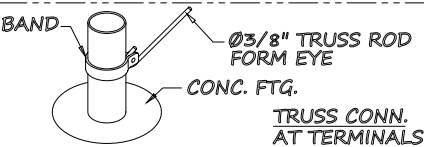






COATINGS:


- FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A
- FABRIC-GALVANIZED PER (ASTM-A392) OZ/SQ.FT. OR
- ALUMINUM COATED PER (ASTM-A491) .40 OZ/SQ.FT.
- PVC COATED PER (ASTM-F668) CLASS
- FITTINGS-GALVANIZED PER (ASTM-A153)

BENDING FORCE ON THE X-X AXIS



LINE POST=274 LBS @ 6'-0" ABOVE GRADE
 TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN

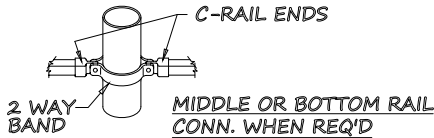

— LBS PER FT.
 — INCHES O.D.

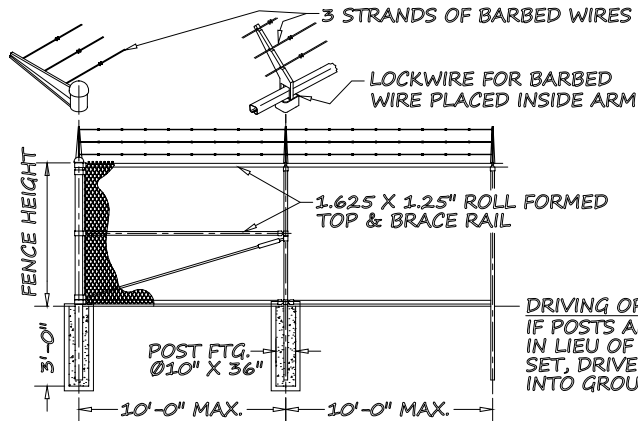

DRIVING OPTION-
 IF POSTS ARE DRIVEN
 IN LIEU OF CONCRETE
 SET, DRIVE 3' MIN.
 INTO GROUND.

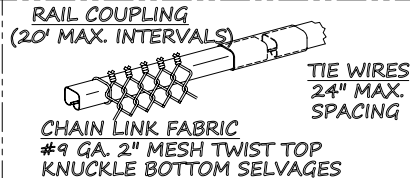

ITEM	QNTY	DESCRIPTION	MACHINING TOLERANCES		FABRICATION TOLERANCES	
SCALE	NONE	CHK'D BY DTM	0.1	+ 0.030	UNDER 18"	+ 1/32
			0.01	+ 0.015	18" AND OVER	+ 1/16
DWN BY	DTM10-17-17	APP'D BY	0.005	+ 0.005	ALL MACHINED SURFACES	15°
			ANGLES	+ 1/48	BREAK ALL SHARP EDGES	
STANDARD 'C' - with BARB WIRE, C-TOP RAIL & ROUND TERM. (CHAIN LINK)						
CAD FILENAME:	FENCE 4-14		GREGORY FENCE 4100 13th Street SW Canton, Ohio 44710		REF. No.	
LAST PLOT DATE:	10/17/17				DRWG No.	
					FENCE 4-16	