


**COATINGS:**






- FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A
- FABRIC-GALVANIZED PER (ASTM-A392) \_\_\_ OZ/SQ.FT. OR
- ALUMINUM COATED PER (ASTM-A491) .40 OZ/SQ.FT.
- PVC COATED PER (ASTM-F668) CLASS \_\_\_
- FITTINGS-GALVANIZED PER (ASTM-A153)

**BENDING FORCE ON THE X-X AXIS**


LINE POST=351 LBS @ 6'-0" ABOVE GRADE  
 TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN

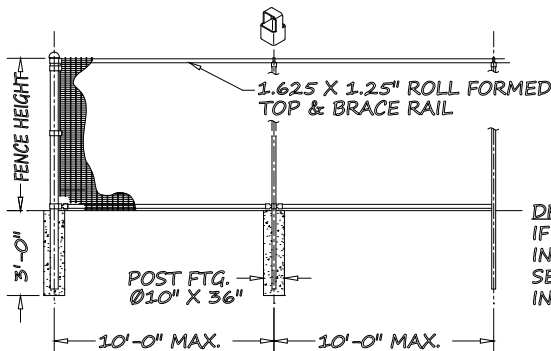

**DRIVING OPTION-**  
 IF POSTS ARE DRIVEN  
 IN LIEU OF CONCRETE  
 SET, DRIVE 3' MIN.  
 INTO GROUND

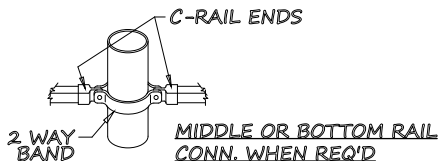


**BRACING ARRANGEMENT**




**TOP RAIL**



**LINE POST TOP**



**RAIL COUPLING**  
 (20' MAX. INTERVALS)




**TIE WIRES**  
 24" MAX.  
 SPACING

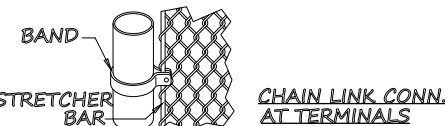

**LINE POST**

**CHAIN LINK FABRIC**  
 #9 GA. 2" MESH  
 #6 GA. 2" MESH

**CHAIN LINK FABRIC**  
 #9 GA. 2" MESH TWIST  
 TOP & KNUCKLE BOTTOM SELVAGES

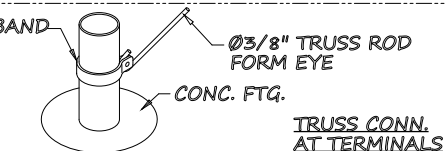

**TRUSS CONN.**  
**AT TERMINALS**

2.25"  
 57.1 MM



**TERMINAL POST**  
 \_\_\_ LBS PER FT.  
 \_\_\_ INCHES O.D.

ITEM		QNTY	DESCRIPTION			MATERIAL	
SCALE	NONE	CHK'D BY	DTM	MACHINING TOLERANCES		FABRICATION TOLERANCES	
DWN BY	DTM01-11-17	APP'D BY		0.1	± 0.030	UNDER 18"	± 1/32
				0.01	± 0.015	18" AND OVER	± 1/16
				0.005	± 0.005	ALL MACHINED SURFACES 15°	
				ANGLES	± 1/8"	BREAK ALL SHARP EDGES	
HEAVY 'C' - w/o BARB WIRE, TOP C-RAIL & ROUND TERM. (CHAIN LINK)							

CAD FILENAME:  
 FENCE 4-19  
 LAST PLOT DATE:  
 09/11/17

**GREGORY**  
 FENCE  
 4100 13th Street SW  
 Canton, Ohio 44710

REF. No.  
 DRWG No.

FENCE 4-19