


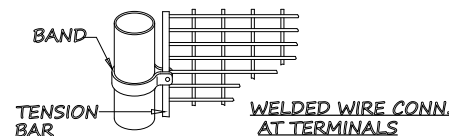
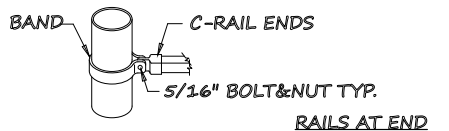
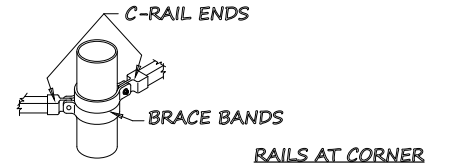



COATINGS:
 FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A
 WELDED FABRIC-COMBINATION 1/2" x 2" - 2" x 2" G.A.W.
 OR PVC COATED.

OTHER FABRIC COMBINATIONS AVAILABLE
 FITTINGS-GALVANIZED PER (ASTM-A153)
 TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN

PHYSICAL PROPERTIES:




| DIMENSIONS | WALL THICKNESS | WEIGHT PER FOOT | SECTION MODULUS | YIELD STRENGTH | MAX. BENDING MOMENT LB. IN. |
|----------------------------------|----------------|-----------------|-----------------|----------------|-----------------------------|
| 3.25" x 2.50" | 0.150" | 5.30# | 1.25 | 60,000 | 75,000 |
| OPTIONAL 3.25" x 2.50" | 0.130" | 4.50# | 1.083 | 60,000 | 64,980 |

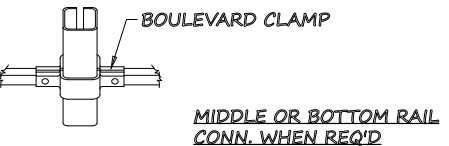

5.30 LB/FT
7.85 kg/m
 OPTIONAL 4.40 LB/FT
0.130 6.52 kg/m
 WALL



TERMINAL POST
 — LBS PER FT.
 — INCHES O.D.

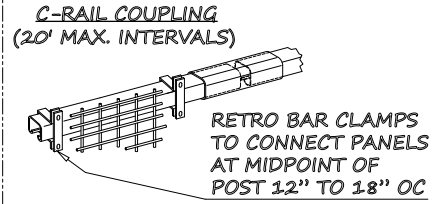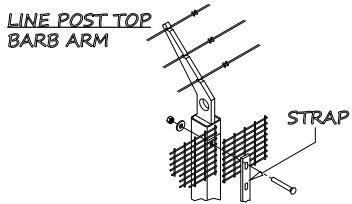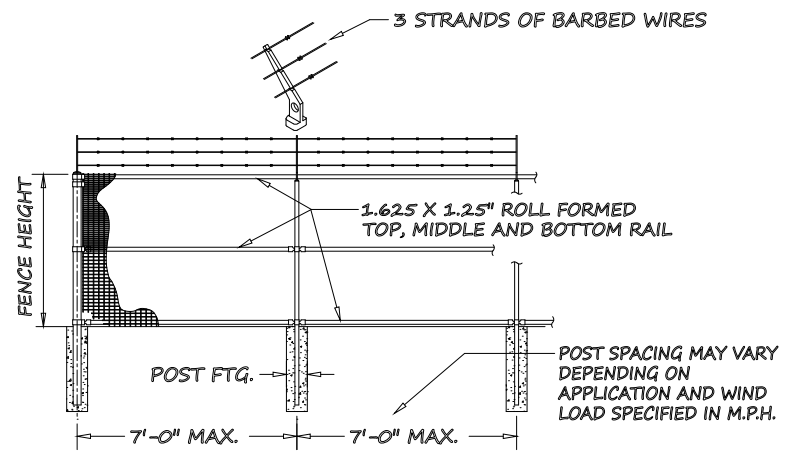

| ITEM | QNTY | DESCRIPTION | MACHINING TOLERANCES | FABRICATION TOLERANCES |
|--------|--------------|--------------|----------------------|------------------------------|
| SCALE | NONE | CHK'D BY DTM | 0.1 ± 0.030 | UNDER 18" ± 1/32 |
| DWN BY | DTM 08/17/17 | APP'D BY | 0.01 ± 0.015 | 18" AND OVER ± 1/16 |
| | | | 0.001 ± 0.005 | ALL MACHINED SURFACES ± 1/16 |
| | | | ANGLES ± 1/4" | BREAK ALL SHARP EDGES |

SUPER 'C' with BARB WIRE, ROUND TERM. (WELDED WIRE)

CAD FILENAME:
 FENCE 4-8
 LAST PLOT DATE:
 08/17/17

GREGORY
 FENCE
 4100 15th Street SW
 Canton, Ohio 44710

REF. No.
 DRWG No.
 FENCE 4-8