




COATINGS:
 FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A
 FABRIC-GALVANIZED PER (ASTM-A392 2.0 OZ/SQ.FT. OR
 -ALUMINUM COATED PER (ASTM-A491) 40 OZ/SQ.FT.
 -PVC COATED PER (ASTM-F668) CLASS 2D
FITTINGS-GALVANIZED PER (ASTM-A153)
TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN

PHYSICAL PROPERTIES:


DIMENSIONS	WALL THICKNESS	WEIGHT PER FOOT	SECTION MODULUS	YIELD STRENGTH	MAX. BENDING MOMENT LB. IN.
3.25" x 2.50"	0.150"	5.30#	1.25	60,000	75,000
OPTIONAL					
3.25" x 2.50"	0.130"	4.50#	1.083	60,000	64,980

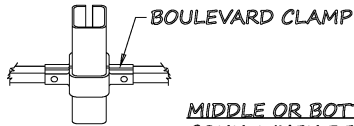




MIDDLE OR BOTTOM RAIL
CONN. WHEN REQ'D



RAILS AT CORNER

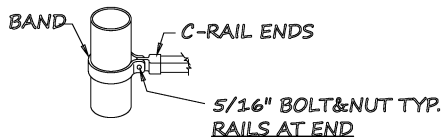

RAILS AT END

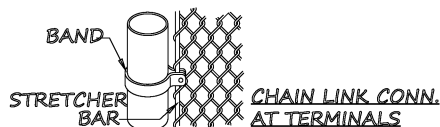


LINE POST

5.30 LB/FT
7.85 kg/m


OPTIONAL WALL
4.40 LB/FT
0.130 6.52 kg/m

TERMINAL POST
— LBS PER FT.
— INCHES O.D.

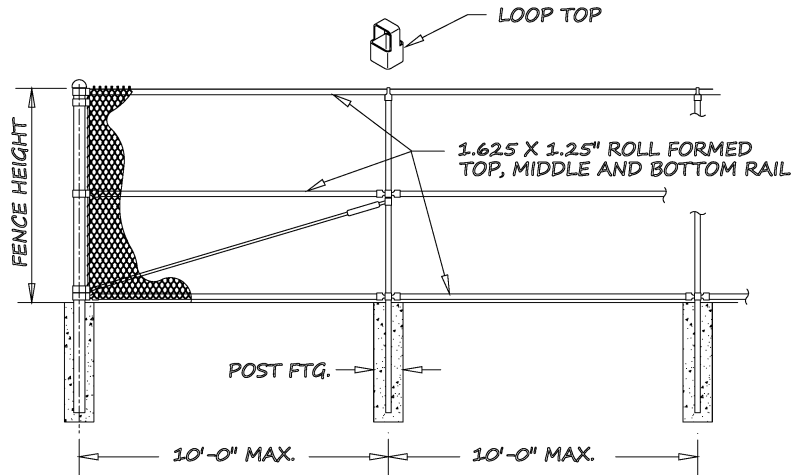


POST SPACING MAY VARY
DEPENDING ON
APPLICATION AND WIND
LOAD SPECIFIED IN M.P.H.

LINE POST TOP
LOOP CAP



CHAIN LINK FABRIC
#9 GA. 2" MESH
#6 GA. 2" MESH

C-RAIL COUPLING
(20' MAX. INTERVALS)



CHAIN LINK FABRIC
GA., 2" MESH TWIST TOP
KNUCKLE BOTTOM SELVAGES

TIE WIRES
24" MAX.
SPACING

ITEM	QNTY	DESCRIPTION	MACHINING TOLERANCES	FABRICATION TOLERANCES	MATERIAL
SCALE	NONE	CHK'D BY DTM	0.1 ± 0.030	UNDER 18" ± 1/32	
DWN BY	DTM 10-17-17	APP'D BY	0.015 ± 0.015	18" AND OVER ± 1/16	
			0.005 ± 1/48	ALL MACHINED SURFACES 125°	BREAK ALL SHARP EDGES

SUPER 'C' - w/o BARB WIRE, ROUND TERM. (CHAIN LINK)

CAD FILENAME:
FENCE 4-1
LAST PLOT DATE:
10/17/17

GREGORY
FENCE

4100 13th Street SW
Canton, Ohio 44710

REF. No.
DRWG. No.

FENCE 4-1