




COATINGS:
 FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A
 FABRIC-GALVANIZED PER (ASTM-A392 2.0 OZ/SQ.FT. OR
 -ALUMINUM COATED PER (ASTM-A491) 40 OZ/SQ.FT.
 -PVC COATED PER (ASTM-F668) CLASS 2D
FITTINGS-GALVANIZED PER (ASTM-A153)
TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN

PHYSICAL PROPERTIES:





DIMENSIONS	WALL THICKNESS	WEIGHT PER FOOT	SECTION MODULUS	YIELD STRENGTH	MAX. BENDING MOMENT LB. IN.
3.25" x 2.50"	0.150"	5.30#	1.25	60,000	75,000
OPTIONAL 3.25" x 2.50"	0.130"	4.50#	1.083	60,000	64,980

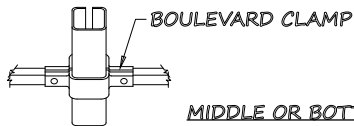

MIDDLE OR BOTTOM RAIL
CONN. WHEN REQ'D



RAILS AT CORNER

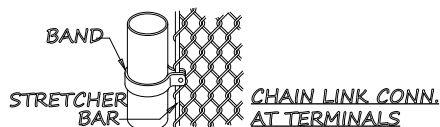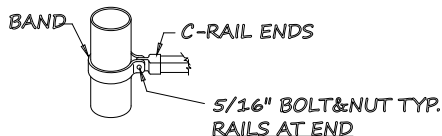


LINE POST

5.30 LB/FT
7.85 kg/m


OPTIONAL
4.40 LB/FT
0.130 6.52 kg/m
WALL

TERMINAL POST
— LBS PER FT.
— INCHES O.D.

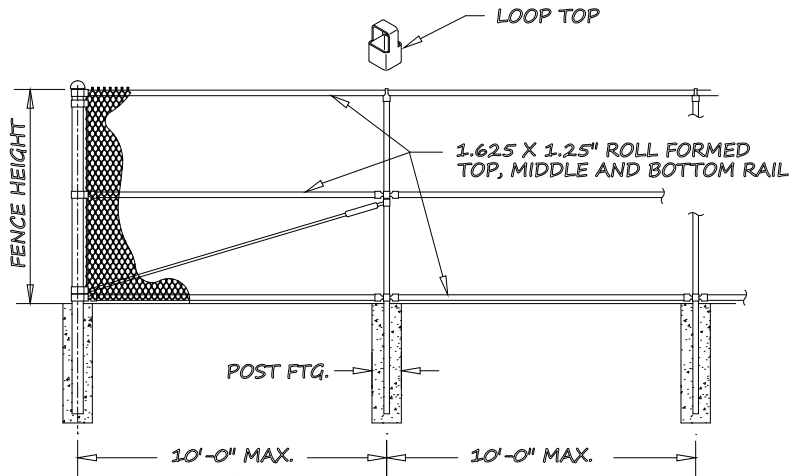

POST SPACING MAY VARY
DEPENDING ON
APPLICATION AND WIND
LOAD SPECIFIED IN M.P.H.

LINE POST TOP
LOOP CAP



CHAIN LINK FABRIC
#9 GA. 2" MESH
#6 GA. 2" MESH

C-RAIL COUPLING
(20' MAX. INTERVALS)



CHAIN LINK FABRIC
GA., 2" MESH TWIST TOP
KNUCKLE BOTTOM SELVAGES

TIE WIRES
24" MAX.
SPACING

ITEM	QNTY	DESCRIPTION	MATERIAL
SCALE	NONE	CHK'D BY DTM	MACHINING TOLERANCES 0.1 ± 0.030 0.02 ± 0.015
DWN BY	DTM 10-17-17	APP'D BY	FABRICATION TOLERANCES UNDER 18" ± 1/32 18" AND OVER ± 1/16 ALL MACHINED SURFACES ± 1/48 BREAK ALL SHARP EDGES

SUPER 'C' - w/o BARB WIRE, ROUND TERM. (CHAIN LINK)

CAD FILENAME:
FENCE 4-1
LAST PLOT DATE:
10/17/17

GREGORY
FENCE
4100 13th Street SW
Canton, Ohio 44710

REF. No.
DRWG No.

FENCE 4-1