


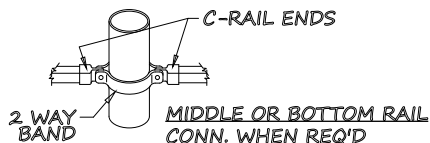


COATINGS:


- FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A
- FABRIC-GALVANIZED PER (ASTM-A392) ___ OZ/SQ.FT. OR
- ALUMINUM COATED PER (ASTM-A491).40 OZ/SQ.FT.
- PVC COATED PER (ASTM-F668) CLASS ___
- FITTINGS-GALVANIZED PER (ASTM-A153)

BENDING FORCE ON THE X-X AXIS:

- LINE POST=274 LBS @ 6'-0" ABOVE GRADE
- TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN

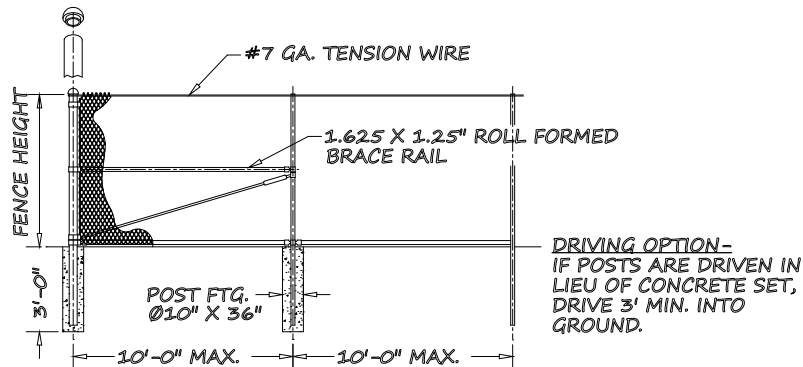

BRACING ARRANGEMENT




LINE POST TOP
OPTIONAL

HOG RINGS
(24" MAX. SPACING)




CHAIN LINK FABRIC
#9 GA. 2" MESH
#6 GA. 2" MESH

TENSION WIRE



HOG RINGS
24" MAX. SPACING


CHAIN LINK FABRIC
#9 GA. 2" MESH TWIST TOP
KNUCKLE BOTTOM SELVAGES

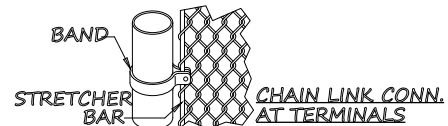

LINE POST
1.875"
47.6 MM



TERMINAL POST
___ LBS PER FT.
___ INCHES O.D.

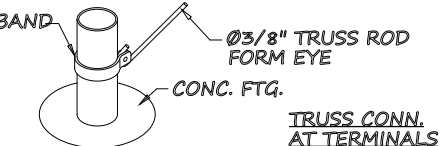

ITEM		QNTY	DESCRIPTION		MATERIAL	
					MACHINING TOLERANCES	
SCALE	NONE	CHK'D BY	DTM	± 0.030		FABRICATION TOLERANCES
DWN BY			DTM01-01-17	APP'D BY	± 0.025	UNDER 18" ±1/32
					± 0.005	18" AND OVER ±1/16
					ANGLES	± 1/48
STANDARD 'C' - with TOP TENSION WIRE & ROUND TERM. (CHAIN LINK)						

CAD FILENAME:
FENCE 4-13
LAST PLOT DATE:
09/01/17

GREGORY
FENCE
4100 13th Street SW
Canton, Ohio 44710

REF. No.
DRWG No.
FENCE 4-13