


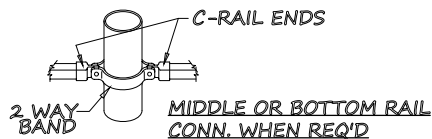


COATINGS:

FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A
 FABRIC-GALVANIZED PER (ASTM-A392) ___ OZ/SQ.FT. OR
 -ALUMINUM COATED PER (ASTM-A491) .40 OZ/SQ.FT.
 -PVC COATED PER (ASTM-F668) CLASS ___
 FITTINGS-GALVANIZED PER (ASTM-A153)



BENDING FORCE ON THE X-X AXIS
 LINE POST=274 LBS @ 6'-0" ABOVE GRADE
 TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN

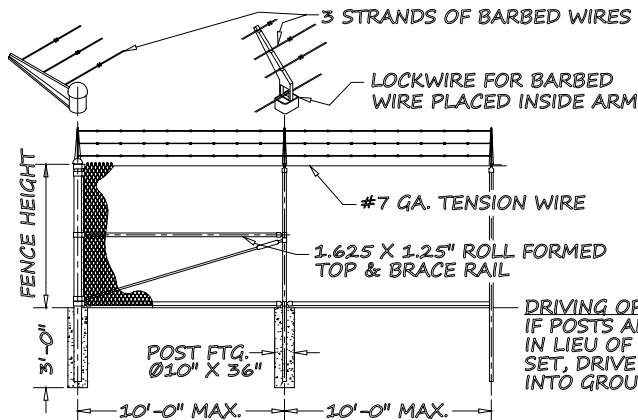


LESS THAN 2 LINE POSTS
 BRACE ONLY

MORE THAN 2 LINE POSTS
 BRACE AND TRUSS ROD

BRACING ARRANGEMENT





LINE POST TOP
 BARB ARM




TENSION WIRE
 CHAIN LINK FABRIC
 #9 GA. 2" MESH TWIST TOP
 KNUCKLE BOTTOM SELVAGES

HOG RINGS
 24" MAX.
 SPACING



TERMINAL POST
 ___ LBS PER FT.
 ___ INCHES O.D.

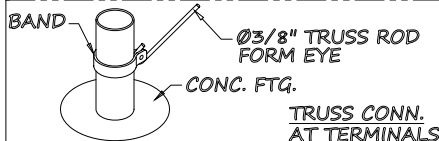

ITEM		QNTY	DESCRIPTION		MATERIAL		
			MACHINING TOLERANCES		FABRICATION TOLERANCES		
SCALE	NONE	CHK'D BY	DTM	0.1	± 0.030	UNDER 18"	± 1/32
				0.01	± 0.015	18" AND OVER	± 1/16
DWN BY DTM 09-01-17 APP'D BY				0.005	± 0.005	ALL MACHINED SURFACES 125	
				ANGLES	± 1/4°	BREAK ALL SHARP EDGES	
STANDARD 'C' - with BARB WIRE, TOP TENSION WIRE & ROUND TERM. (CHAIN LINK)							
CAD FILENAME: FENCE 4-14				GREGORY FENCE 4100 13th Street SW Canton, Ohio 44710		REF. No. DRWG No.	
LAST PLOT DATE: 09/01/17						FENCE 4-14	