


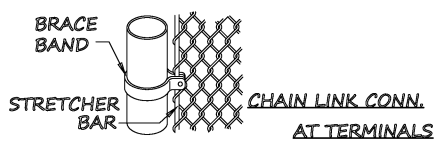
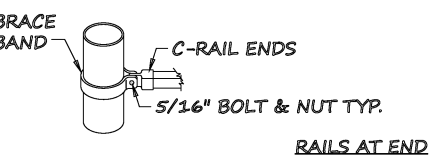
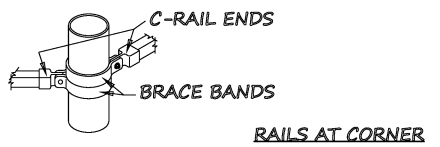



**COATINGS:**  
 FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A  
 FABRIC-GALVANIZED PER (ASTM-A392 2.0 OZ/SQ.FT. OR  
 -ALUMINUM COATED PER (ASTM-A491) .40 OZ/SQ.FT.  
 -PVC COATED PER (ASTM-F668) CLASS 2D  
**FITTINGS-GALVANIZED PER (ASTM-A153)**  
**TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN**

**PHYSICAL PROPERTIES:**


DIMENSIONS	WALL THICKNESS	WEIGHT PER FOOT	SECTION MODULUS	YIELD STRENGTH	MAX. BENDING MOMENT LB. IN.
3.25" x 2.50"	0.150"	5.40#	1.25	60,000	75,000
<b>OPTIONAL</b>					
3.25" x 2.50"	0.130"	4.50#	1.083	60,000	64,980

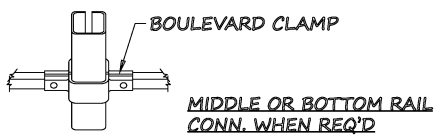

0.150	5.40 LB/FT
WALL	7.85 kg/m
0.130	4.50 LB/FT
WALL	6.52 kg/m




**TERMINAL POST**  
 — LBS PER FT.  
 — INCHES O.D.

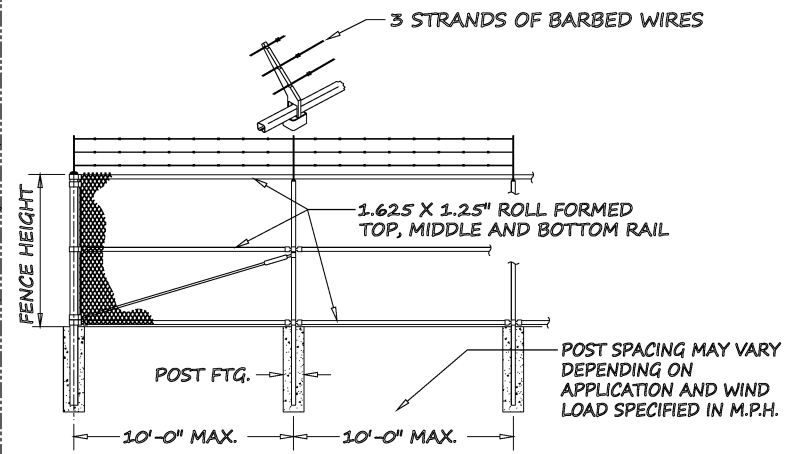

**LINE POST TOP BARB ARM**

**CHAIN LINK FABRIC**  
 #9 GA. 2" MESH  
 #6 GA. 2" MESH



**RAIL COUPLING**  
 (20' MAX. INTERVALS)

**TIE WIRES**  
 24" MAX. SPACING  
**CHAIN LINK FABRIC**  
 # GA., 2" MESH TWIST TOP  
 KNUCKLE BOTTOM SELVAGES

ITEM	QNTY	DESCRIPTION	MATERIAL
		MACHINING TOLERANCES	FABRICATION TOLERANCES
SCALE	NONE	CHK'D BY DTM	0.1 ± 0.030
DWN BY	DTM 10-17-17	APPD BY	0.01 ± 0.015
		ANGLES	0.001 ± 0.005
			1/4" ± 1/4"

SUPER 'C' - with BARB WIRE, ROUND TERM. (CHAIN LINK)

CAD FILENAME:  
 FENCE 4-2  
 LAST PLOT DATE:  
 10/17/17

**GREGORY**  
 FENCE  
 4300 13th Street SW  
 Canton, Ohio 44710

REF. No.  
 DRWG No.  
 FENCE 4-2