


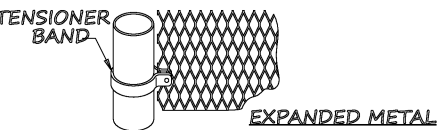
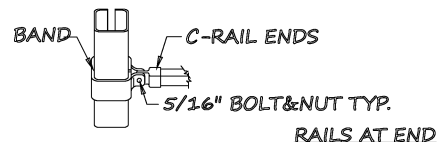
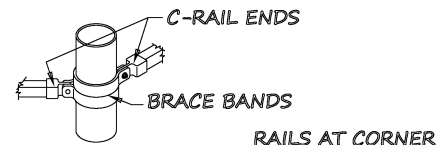

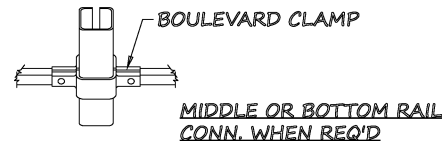


COATINGS:
 FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A
 EXPANDED METAL PANELS 4' OR 5' WIDE X FENCE HEIGHT
 1"-7 OR 3/4"-9 REVERSED DIAMOND
 FITTINGS-GALVANIZED PER (ASTM-A153)
 TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN

PHYSICAL PROPERTIES:

DIMENSIONS	WALL THICKNESS	WEIGHT PER FOOT	SECTION MODULUS	YIELD STRENGTH	MAX. BENDING MOMENT LB. IN.
3.25" x 2.50"	0.130"	4.50#	1.25	60,000	75,000
DIMENSIONS	WALL THICKNESS	WEIGHT PER FOOT	SECTION MODULUS	YIELD STRENGTH	MAX. BENDING MOMENT LB. IN.
3.25" x 2.50"	0.150"	5.40#	1.25	60,000	75,000


RETRO BAR CLAMPS TO CONNECT PANELS AT MIDPOINT OF POST 12" TO 18" OC

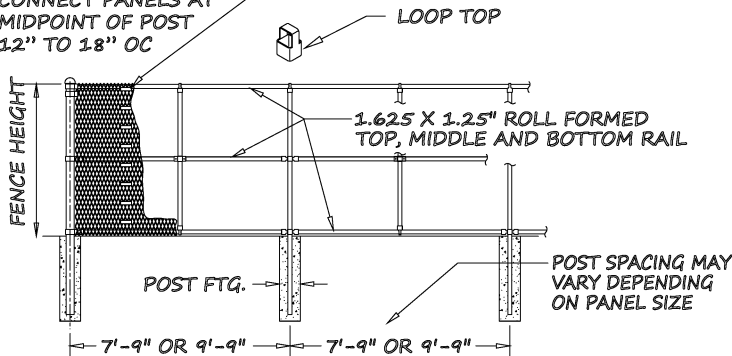


LINE POST
 5.40 LB/FT
 7.85 kg/m

TERMINAL POST
 9.11 LBS PER FT.
 4" INCHES O.D.

LINE POST TOP LOOP TOP



RAIL COUPLING (20' MAX. INTERVALS)



ITEM	QNTY	DESCRIPTION		MATERIAL
			MACHINING TOLERANCES	FABRICATION TOLERANCES
SCALE	NONE	CHK'D BY	DTM	UNDER 18" ±.1/32
DWN BY	DTM10-17-17	APP'D BY		18" AND OVER ±.1/16
				±.001 ANGLES ±.1/48
ALL MACHINED SURFACES 155				
BREAK ALL SHARP EDGES				

SUPER 'C' - w/o BARB WIRE, ROUND TERM. (EXPANDED METAL)

CAD FILENAME:
 FENCE 4-3
 LAST PLOT DATE:
 10/17/17

GREGORY
 FENCE
 4100 13th Street SW
 Canton, Ohio 44710

REF. No.
 DRWG No.

FENCE 4-3