
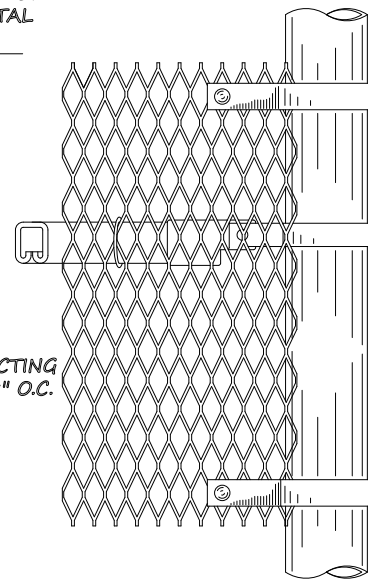


RAIL TIE SPACING 24"


1"-7 EXPANDED METAL OR
3/4"-9 EXPANDED METAL
REVERSED DIAMOND

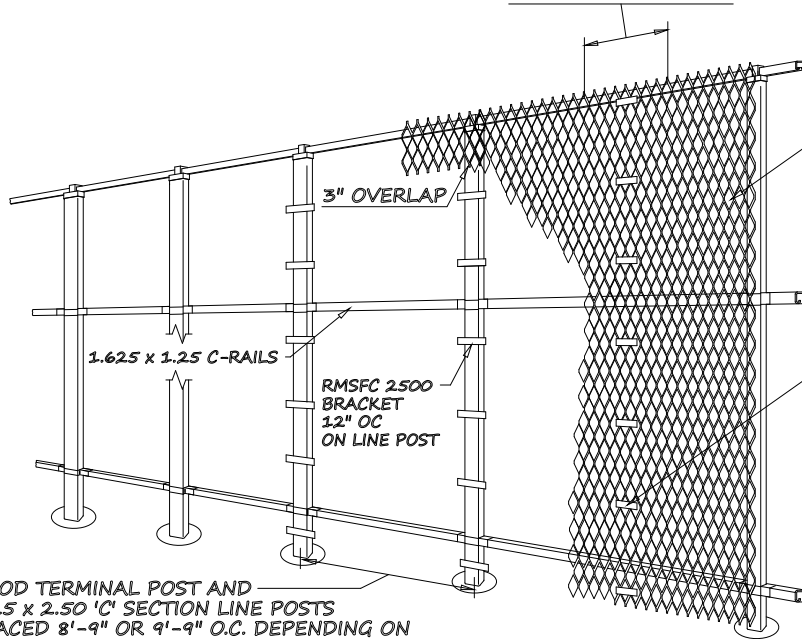

CORNER CONNECTION

10 GA. x 1" MINIMUM FLAT BAR RMSFC 2500 FORMED AS SHOWN

5/16-16 UNC x 1-1/2 LG. CARRIAGE BOLTS AND NUTS 2 REQUIRED PER CLAMP

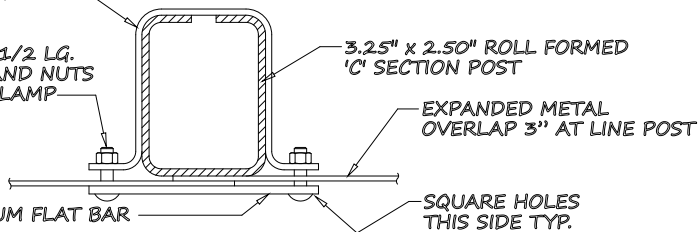

10 GA. x 1" MINIMUM FLAT BAR RMSFC 325

ITEM	QNTY	DESCRIPTION		MACHINING TOLERANCES		FABRICATION TOLERANCES	
SCALE	NONE	CHK'D BY	DTM	0.2	± 0.030	UNDER 18"	± 1/32
				0.01	± 0.015	18" AND OVER	± 1/16
DWN BY	DTM	08-14-17	APP'D BY	0.005	± 0.005	ALL MACHINED SURFACES	± 1/48
				ANGLES	± 1/48	BREAK ALL SHARP EDGES	

SUPER 'C' - w/o BARB WIRE, ROUND TERM. PANEL CLAMPS (EXPANDED METAL)

CAD FILENAME:
FENCE 4-5
LAST PLOT DATE:
08/14/17

GREGORY
FENCE

4100 13th Street SW
Canton, Ohio 44710

REF. No.
DRWG No.

FENCE 4-5